

Conwed Fibers® EnviroBlend® with TriFlo™ Wood/Cellulose Blend

Now with
TriFlo™


Makes the best hydraulic
mulch even better!

- Improves moisture retention
- Improves the suspension of mulch, seed and fertilizer within the slurry and prevents the dewatering of the fiber mulch
- Improves the application of hydraulic mulch in a more uniform layer for better coverage and enhanced product performance
- Improves application efficiency by increasing shooting distance and enhancing hose performance—greatly reducing downtime associated with clogging



Thermally Refined® manufacturing process provides a
higher quality wood mulch and unsurpassed performance.

- Conwed Fibers® EnviroBlend® with TriFlo™ has the added value of enhanced coverage and assists the mulch in adhering to the soil surface
- Combines 100% Thermally Refined wood fiber with the highest quality cellulose, allowing for up to 15-20% greater coverage vs. competitor's blend products
- EnviroBlend covers more ground than cellulose without a big jump in price
- The blend of wood and cellulose is both easy to mix and spray, combining good yield and erosion control qualities
- Non-toxic and environmentally safe
- Maximum slope length of 23 feet [7 m]
- EnviroBlend functional longevity is ≤ 3 months

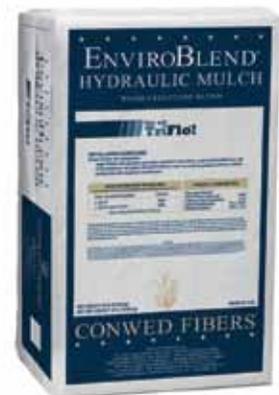

Product Composition:

Thermally Refined® Wood Fibers (minimum) – 60%
Cellulose Fiber (maximum) – 27%
Proprietary Emulsifying Agents (TriFlo) – 1% ± 0.5%
Moisture Content – 12% ± 3%
[40] 50-lb [23 kg] bales per pallet

Slope Gradient/Condition

≤ 4H:1V
> 4H:1V and ≤ 3H:1V

Rate

2000 lb/ac [2300 kg/ha]
2500 lb/ac [2800 kg/ha]



PROFILE Products LLC · 750 Lake Cook Road · Suite 440 · Buffalo Grove, IL 60089
Technical Assistance: 800-508-8681
www.conwedfibers.com